





# DEGSON ELECTRONICS CO., LTD.

## Product Specification

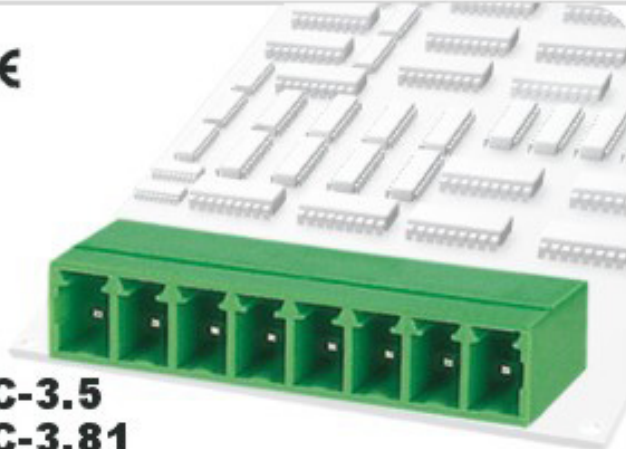


**15EDGRC-3.5**  
**15EDGRC-3.81**

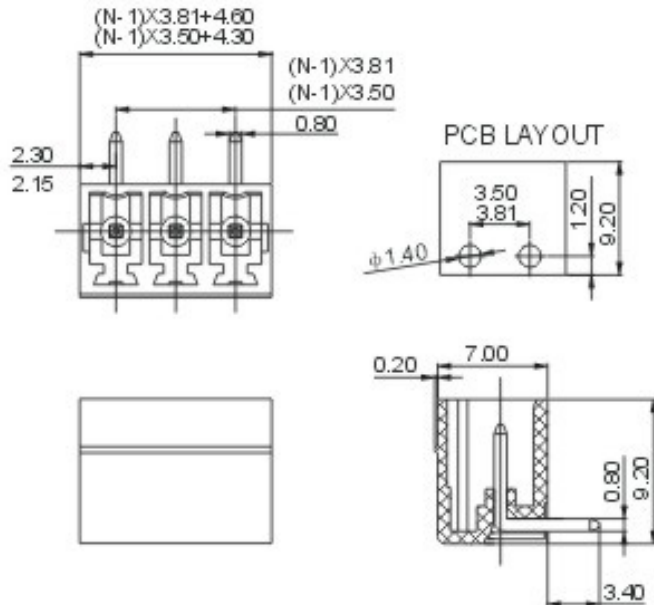

<b>Approval</b>		
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
With standing voltage	AC2000V/1Min	
<b>Mechanical</b>		
Ambient temperature	-40°C~+105°C	
<b>Dimensions</b>		
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P-24P	
<b>Material</b>		
Housing	PA66, UL94V-0	
Pin header	Brass, Tin plated	

### HOW TO ORDER

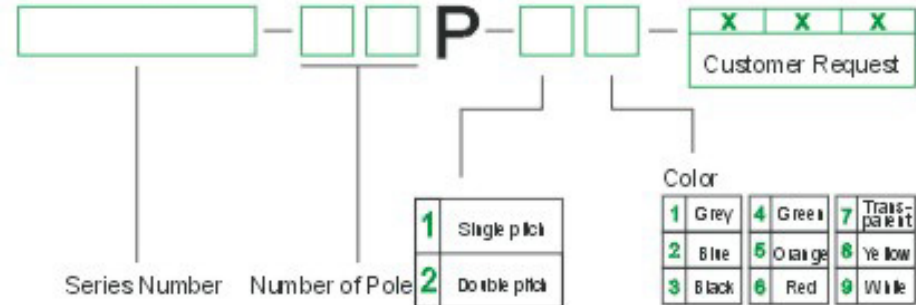

 MM (INCH)	 <b>DEGSON ELECTRONICS CO., LTD.</b>
 <small>THREADED PIN    PROTRUSION</small>	NAME <b>15EDGRC-3.5</b> <b>15EDGRC-3.81</b>