



For K3161 K3162 K31625



For K3163



Contact resistance : 30mΩ Max. (initial)
 Insulation resistance : 50MΩ Min. at 250VDC.
 Withstanding voltage : 250VAC for one minute.
 Insertion force : 5.0 kg.
 Extraction force : 4.0 kg.
 Life time : 5,000 cycles Min.

K3161
3P ~ 8P din plug




K316426
4P mini din plug
tin-nickel barrel



K3162
3P ~ 8P din plug




K316428
4P mini din plug
tin-nickel barrel



K31625
3P ~ 8P din plug right angle metal type




K316430
4P mini din plug
tin-nickel barrel




K3163
3P ~ 8P mini din plug



K316490
7P mini din plug




K316420
4P mini din plug
satin chrome barrel




K31650
9P mini din plug



K316422
4P mini din plug
satin silver barrel



K31651
13P din plug

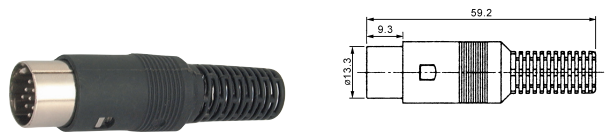

K316424
4P mini din plug
satin nickel barrel



K3167
8P mini din plug

