
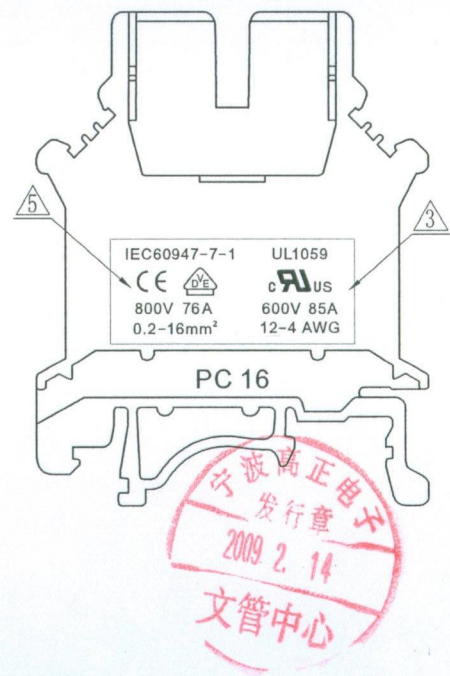


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		图面更新	HW	05/07/06*
△		X00000820 改为 6009B00010	LYK	06/24/06*
△		增加UL刻字	CSX	03/26/07*
△		品名、料号增加环保标示“00”	LJH	12/10/07*
△		增加VDE刻字及参数	WLM	07/18/08*
△		图面更新	LJH	02/13/09*

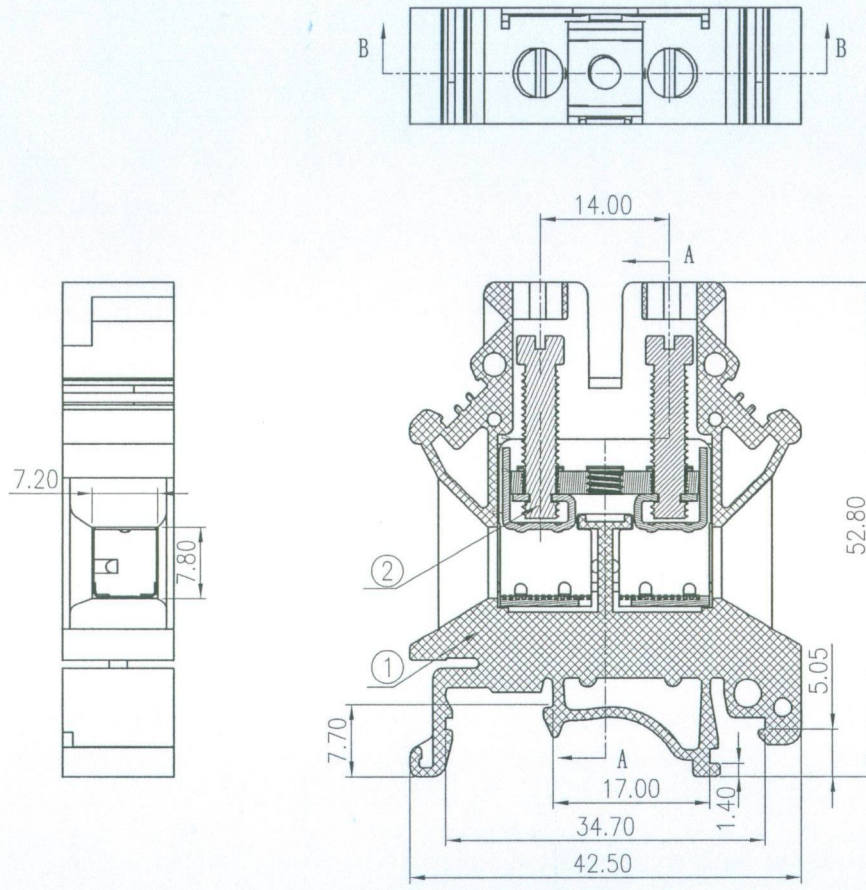

Notes:

- Rated current/voltage:UL 600V/85A  
VDE 800V/76A
- Operation temperatures:-40° C~+105° C
- Withstanding Voltage: AC3000V/1min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range: 12~4AWG, 0.2~16mm²
- Max. Torque Value:M4, 12.24kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	to	to	to	to	to	
6	10	10	30	60	100	150		∩
10	24	30	60	100	150			□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.005/10

2	PC16 Hardware	6009B00010(H)	1	Brass	Ni plated
1	PC16 Housing	6009A0Y01A(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS		DFTD ZhuWn DATE 07/19/05 CHKD DATE MFD DATE APPVL JY DATE 2/13/09 MATERIAL: G.E: FINISH: SCALE: 1:1			
		宁波高正电子有限公司 DEGSON ELECTRONICS CO.,LTD NAME PC16-01P-1Y-00A(H) DRAWING NO. PC16-E01 /PART NO. DO NOT SCALE DRAWING			
		SIZE A3		REV T6 02/13/09*	
		SHEET 1		OF 1	