
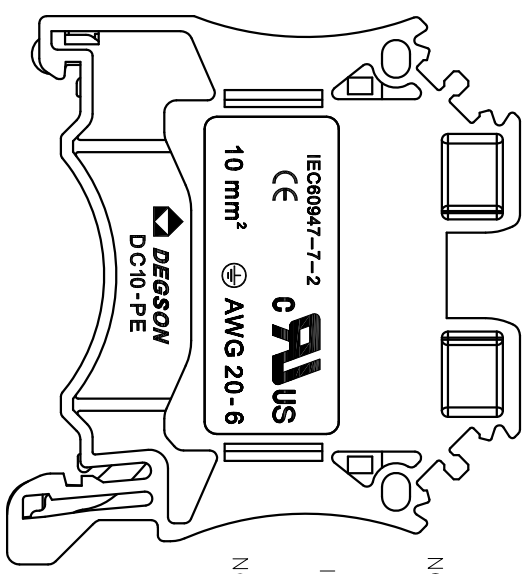
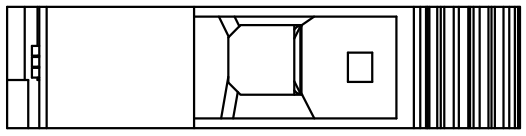
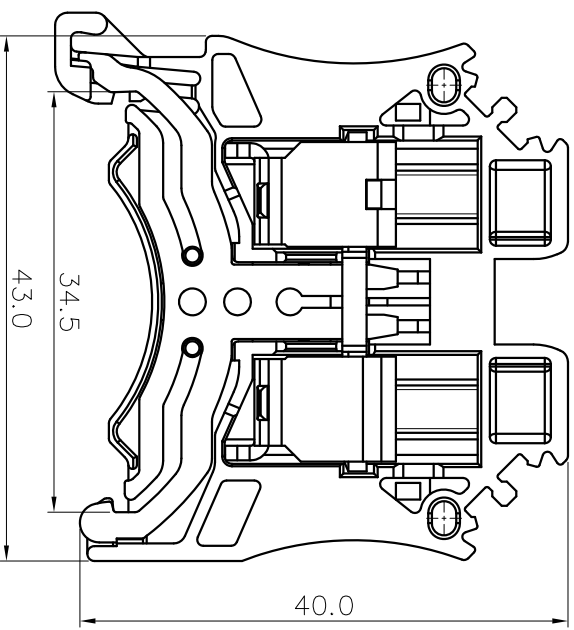


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

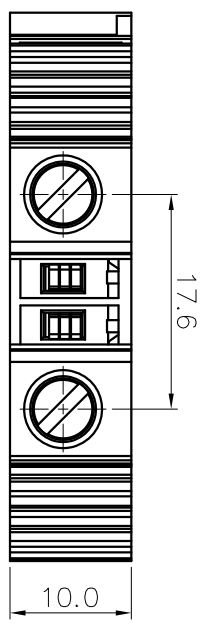

NOTES1:

- UL Standard
  - 1. Torque value : M4 , 14Lb.in
  - 2. Wire range : 20~6AWG
- IEC Standard
- 1. Torque value : M4 , 1.5N·m
  - 2. Wire range : 0.5~10mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 10.0mm, Poles : N=01P
- 3. Stripping length : 10~12mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In mm		Nominal Dimension		Range		Tolerance	
	Over	TO	Over	TO	Over	TO		
6	10	10	30	60	100	150	0.1/0	
10	10	24	30	60	100	150	<	
F0.15	F0.20	H0.30	H0.30	H0.50	F0.70	F1.00	F1.30	±2°

6. RoHS Compliance

DC10-PE - 01P - 1C - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color): 1. (Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)  
 C. (Yellow and green)

DETACHED LISTS		NAME:	
PART NO.:	/	DESSON® NINGBO DESSON ELECTRICAL CO., LTD	
APPD:	/	宁波高松电子有限公司	
CHKD:	/	DC10-PE-01P-1C-00A(H)	
DRFT:	/	TITLE:	CUSTOMER DRAWING
		DRAWING NO.:	/
			REV
			DO
			SHEET
			1/1
			SCALE
			1:1

