
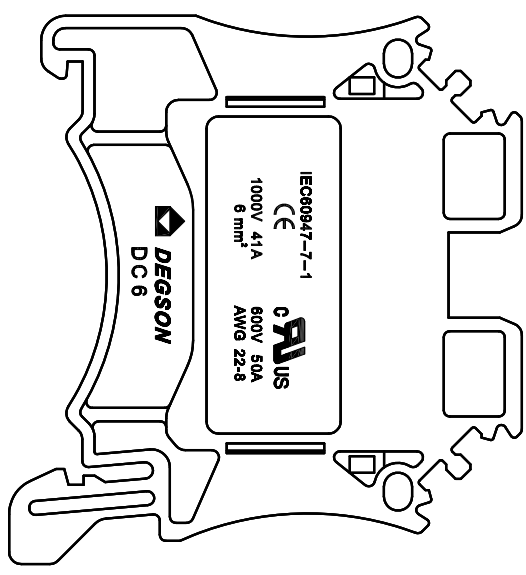

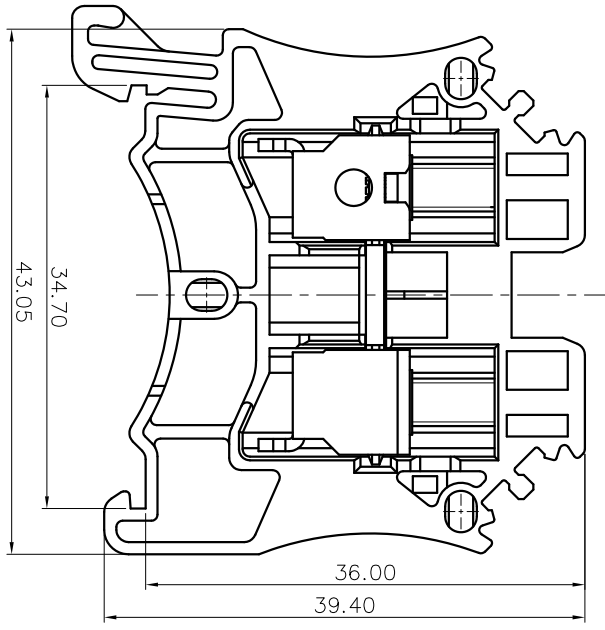


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

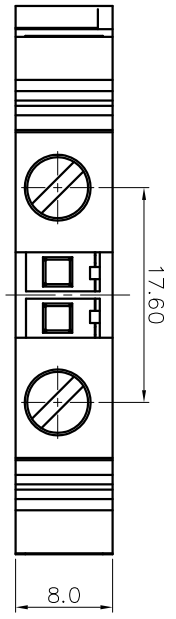

- NOTES1:
UL Standard
1. Rated voltage/current : 600V / 50A
2. Withstanding voltage : AC2200V/1Min.
3. Torque value : M4 , 10.53Lb.in
4. Wire range : 22~8AWG
- IEC Standard
1. Pollution degree : 3
Rate voltage category : III
Rate impulse voltage(kV) : 8kV
Rate voltage(V) : 1000V
Rate current(A) : 41A
2. Torque value : M4 , 1.2N·m
3. Wire range : 0.5~6mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 8.0mm, Poles : N=01P
3. Stripping length : 10~12mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch Range	Nominal Dimension Range					
	mm	In	mm	In	mm	In
Over	6	10	30	60	100	150
TO	10	24	30	60	100	150
±	±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
						±2°

6. RoHS Compliance

DC6 - 01P - 1Y - 00A (H)
(RoHS)
00A - (Standard)
(Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DESSON ELECTRICAL CO., LTD
APPD:	/	APPD:	NINGBO DESSON ELECTRICAL CO., LTD
CHKD:	/	CHKD:	NINGBO DESSON ELECTRICAL CO., LTD
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

