
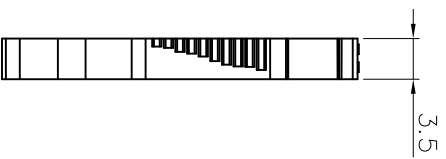
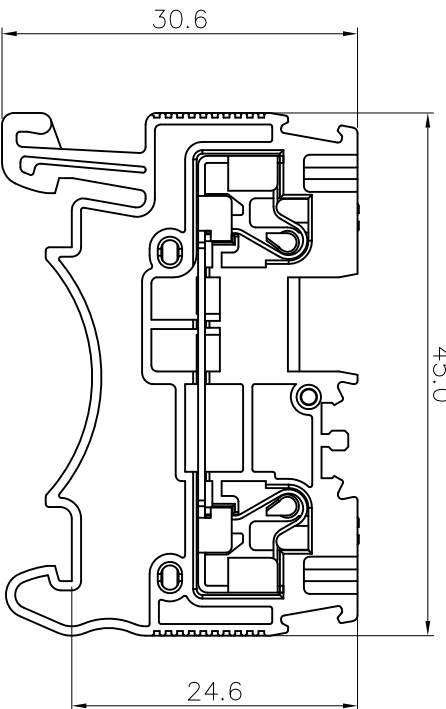


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

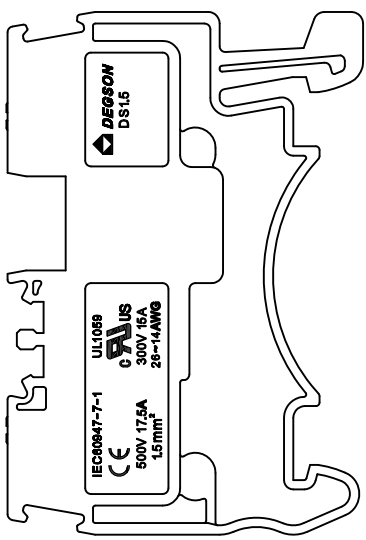

NOTES1:

- UL Standard
- 1. Rated Voltage/Current : 300V / 15A
- 2. Withstanding Voltage : AC1600V/1Min.
- 3. Wire Range : 26~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6.0KV
Rate Voltage(V)	500V
Rate Current(A)	17.5A


2. Wire Range : 0.2~1.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5mm, Poles : N=01P
- 3. Stripping length : 8-10mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned Tolerances:

Pitch Range	In mm		Nominal Dimension Range		mm
	Over	Tolerance	Over	Tolerance	
6 TO 10	±0.10	±0.10	±0.10	±0.10	0.1/0
10 TO 24	±0.10	±0.10	±0.10	±0.10	<
24 TO 30	±0.10	±0.10	±0.10	±0.10	<
30 TO 60	±0.15	±0.15	±0.15	±0.15	<
60 TO 100	±0.20	±0.20	±0.20	±0.20	<
100 TO 150	±0.30	±0.30	±0.30	±0.30	<
150 TO 1000	±0.50	±0.50	±0.70	±1.00	±2*

6. RoHS Compliance

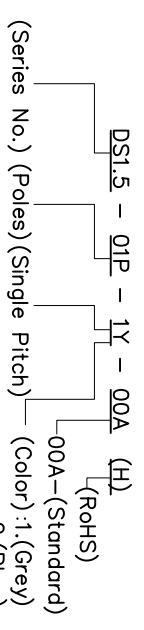

- (Series No.) (Poles) (Single Pitch) (Color):
- 1. (Grey)
 - 2. (Blue)
 - 3. (Black)
 - 4. (Green)
 - 5. (Orange)
 - 6. (Red)
 - 7. (Transparent)
 - 8. (Yellow)
 - 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	NAME:	DS1.5-01P-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1:1