



REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

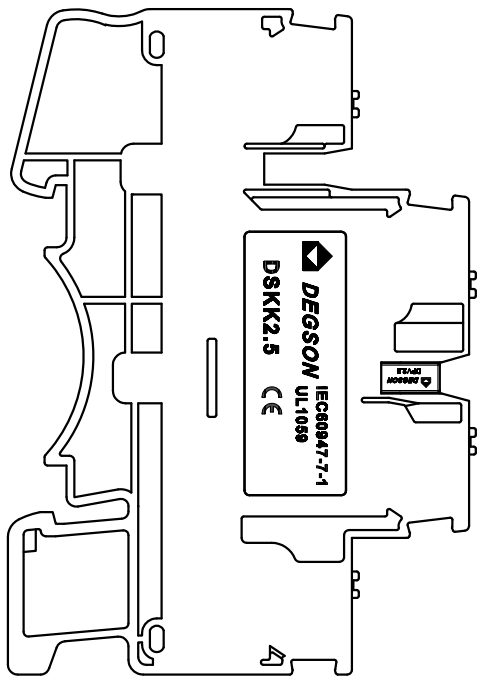

5.15

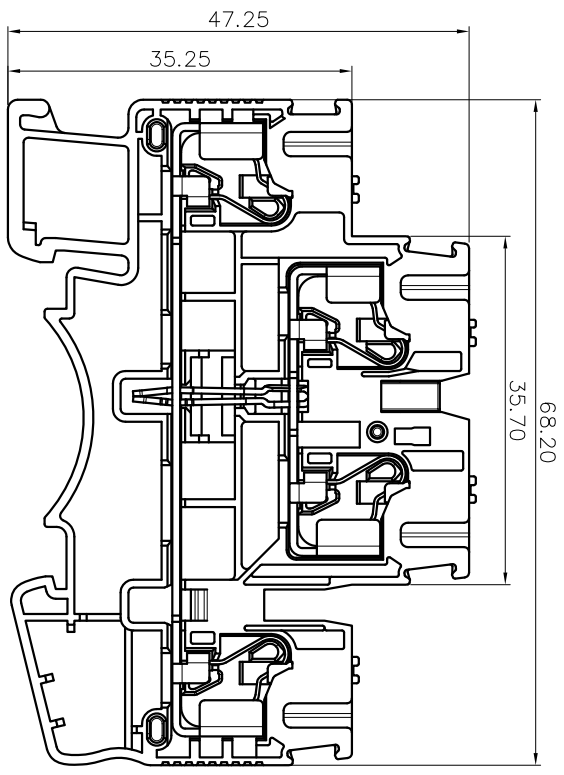

NOTES1:
UL Standard
1. Rated voltage/current : 300V / 20A
2. Withstanding voltage : AC1600V/1Min.
3. Wire range : 26~12AWG
IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6.0KV
Rate voltage(V)	500V
Rate current(A)	22A

2. Wire range : 0.2~2.5mm²&4mm²(sol)

NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.15mm,
3. Stripping length : 11~12mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension in mm	Over	Under
6 TO 10	6 TO 10	0.1	0
10 TO 24	10 TO 30	0.1	0
30 TO 60	30 TO 60	0.1	0
60 TO 100	60 TO 100	0.1	0
100 TO 150	100 TO 150	0.1	0
±0.15	±0.30	±0.30	±0.70
±1.00	±1.00	±1.00	±1.30
±2°	±2°	±2°	±2°

6. RoHS Compliance

DSKK2.5 - 01P - 1Y - 50A (H)
(Series No.) (Poles)(Single Pitch)
(RoHS)
50A-(Standard)
(Color) : 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD
APPR:		TITLE:	CUSTOMER DRAWING
CHKD:		DRAWING NO.:	/
DRFT:		REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1

A 8 7 6 5 4 3 2 1