
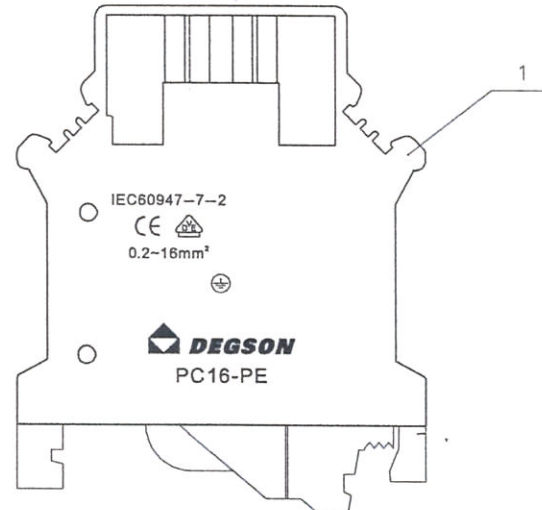
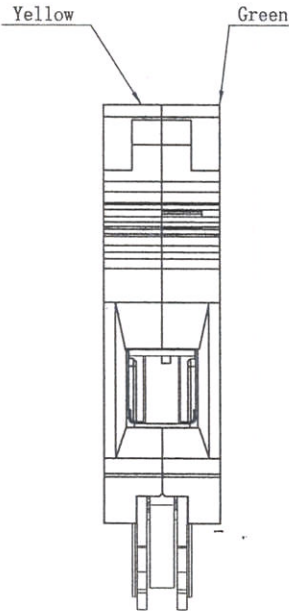
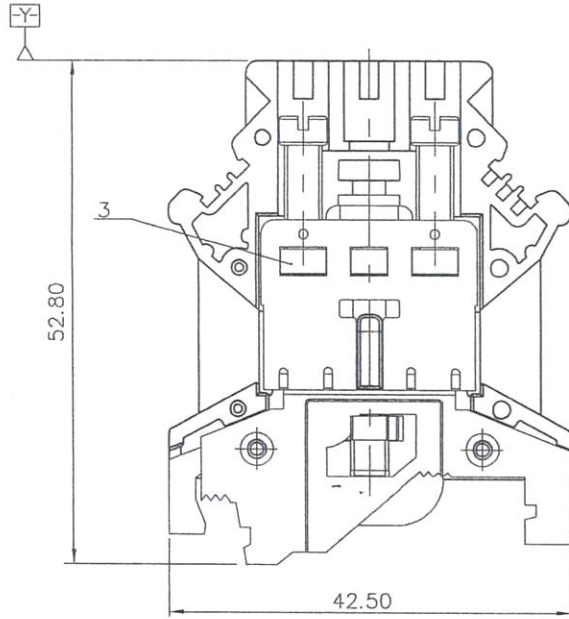


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	16-0352	零件序号标识位置变更	JL	11/07/16"

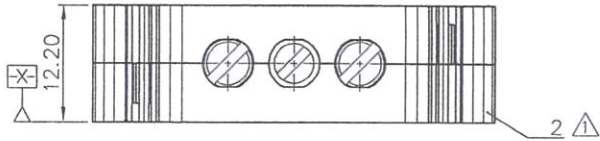

齐复专用
 2016.12.07
 (仅限内部使用,对外无效)

NOTES1:

UL Standard

- 1.Torque value : M4 , 10.53Lb.in
- 2.Wire range : 12~4AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
- 2.Torque value : M4 , 1.2N.m
- 3.Wire range : 0.2~16mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 12.20mm, Poles : N=01P
- 3.Stripping length : 11~12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						Tolerances	
TO	Over	TO	Over	TO	Over	TO	Over	0.1/10	±
6	10	10	24	30	60	100	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2'

6.RoHS Compliance

ITEM	NAME OF PART	MATERIAL	NOTES
3	PC16-PE-Ground contact		
2	PC16-PE-Housing	PA66	UL94V-0
1	PC16-PE-Housing	PA66	UL94V-0

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Alan 11/11/16"	NAME: PC16-PE-01P-1Y-00A(H)		
	CHKD: ZYK 11/11/16"	TITLE: CUSTOMER DRAWING		
	DRFT: Zhuwm 11/02/05"	REV: T1	SHEET: 1/1	
 THIRD ANGLE PROJECTION		DRAWING NO.: PC16-PE-C01	SCALE: 1:1	
		DO NOT SCALE DRAWING		