


REVISION RECORD

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
|-----|-----|-------------|------|------|

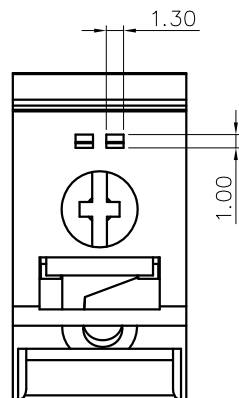

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 20A
- 2.Torque Value : M4 , 10.53Lb.in
- 3.Wire Range : 20~12AWG

IEC Standard




- 1.Rated Voltage/Current : 250V / 32A
- 2.Torque Value : M4 , 1.2N·m
- 3.Wire Range : 0.75~4mm²

NOTES2:


- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Poles : N=01P
- 3.Stripping length : 8~10mm
- 4.Withstanding Voltage : AC2000V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:

| Pitch range in mm | | Nominal dimension range in mm | | | | - | ∩ | ∇ |
|-------------------|---------|-------------------------------|----------|-----------|------------|--------|-------|-------|
| TO | Over TO | Over TO | Over TO | Over TO | Over TO | 0.1/10 | | |
| 6 | 6 TO 10 | 10 TO 24 | 30 TO 60 | 60 TO 100 | 100 TO 150 | | | |
| | ±0.15 | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 |
| | | | | | | | | ±2' |

7.RoHS Compliance

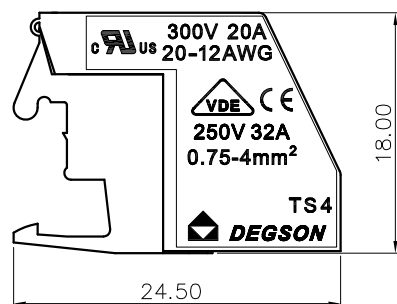

TS 4 - 01P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)



| | | | | | |
|----------------|------------------------|----------------------|--------------|-------|-----|
| DETACHED LISTS | PART NO.: | / | | | |
| | APPD: | / | | | |
| | CHKD: | / | | | |
| | DRFT: | / | | | |
| | THIRD ANGLE PROJECTION | | DRAWING NO.: | | REV |
| | | / | | SHEET | 1/1 |
| | | MM (INCH) | | SCALE | 1:1 |
| | | DO NOT SCALE DRAWING | | | |

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

TS 4-01P-1Y-00A(H)

CUSTOMER DRAWING

DO NOT SCALE DRAWING

SCALE 1:1